


IT7300 Programmable AC Power Supply

Cal Power

Via Acquarana, 29 22100 COMO
tel. 031.526.566 (r.a.) fax 031.507.984
info@calpower.it www.caltower.it

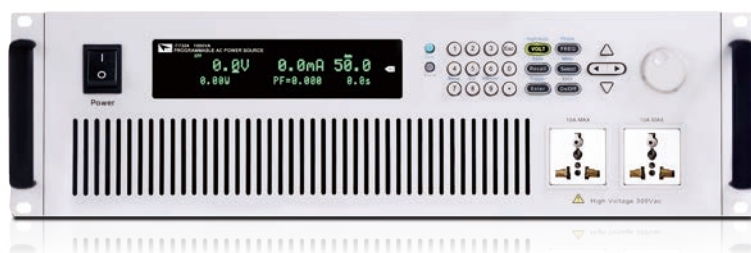

Applications

Motor industry, Illumination, Aviation, Military, Lab testing, Production line test, etc.

Feature

- Precise Linear amplification technology, low noise, high stability
- High power density design, 300VA for 1/2 2U, 1500VA for 3U size, save installation space
- Adjustable frequency: 45Hz-500Hz
- Adjustable phase angle: 0-360°
- Settable output slew rate of voltage and frequency
- High current crest factor for surge current testing
- TRIAC Dimmer dimming / governor simulation function
- Output the changed synchronous TTL signal
- LIST mode for testing power perturbation (PLD) simulation
- Simulate the surge, trap waveform
- Voltage dip, short interruption and voltage change simulation
- Measure various electrical parameters, including RMS voltage / current, actual power, power factor, VA (apparent power), peak current and other parameters
- Measurement resolution 0.01W / 0.1mA, meet Energy Star standard requirement
- Built-in GPIB, RS-232, USB and LAN (support SCPI protocol)*1
- Support three devices connection through System Bus to achieve three-phase AC power function
- OCP, OVP, OTP, OPP

*1 IT7321 model is without GPIB interface

*2 IT7321 model does not support three phase

In order to meet the wider range of AC power supply and more complex change characteristics, engineers need more powerful and stable AC power supply to simulate the actual working environment. IT7300 series is the best solution in this area. IT7300 series can be widely applied in the electronics and electrical industry, lighting, aviation, military, R&D specification's verification, laboratory testing and factory production online test etc.

Model	Voltage	Current	Power	Phase	Size
IT7321	300V	3A	300VA	1φ	1/2 2U
IT7322	300V	6A	750VA	1φ	3U
IT7324	300V	12A	1500VA	1φ	3U
IT7326	300V	24A	3000VA	1φ	6U
IT7322H	500V	3A	750VA	1φ	3U
IT7324H	500V	6A	1500VA	1φ	3U
IT7326H	500V	12A	3000VA	1φ	6U
IT7322T	300V	6A	2250VA	3φ	15U
IT7324T	300V	12A	4500VA	3φ	24U
IT7326T	300V	24A	9000VA	3φ	24U
IT7322HT	500V	3A	2250VA	3φ	15U
IT7324HT	500V	6A	4500VA	3φ	24U
IT7326HT	500V	12A	9000VA	3φ	24U

Linear amplification technology

IT7300 Series AC Power Supply adopts advanced and high-precision linear amplification design to provide low noise and high stability output. This technology has high-speed response characteristics, stable low noise, it can simulate the abnormal power line, instantaneous voltage rise, drop and power off, and can be applied to ATE and so on.

Built-in AC power meter


IT7300 series directly shows voltage RMS, current RMS, frequency, active power, power factor from panel without external power meter, saving the test cost and complex connection operation time.

No power frequency transformer power supply, low power consumption

IT7300 series AC source provide no power frequency transformer power supply with lower power consumption, it solves output problems of large volume, huge heat dissipation and low power output caused by using frequency transformer, IT7300 series also provide linear adaptation method between the current and AC voltage in AC source, which solves the problem of high energy consumption and low accuracy.


Adjustable phase angle

Users can set the start and stop phase angle within range of 0-360°. This function is widely used for startup and shutdown current inrush impact test or various rectifier performance tests.

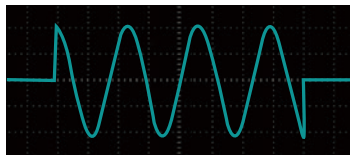


TRIAC Dimmer simulation function

ITECH is the pioneer of TRIAC Dimmer function. This function is used to do dimming and speed regulating test for lamp or electric motor to ensure the products work well when controller of dimming and speed regulating is needed.

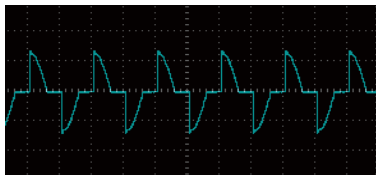

Front Phase Dimmer

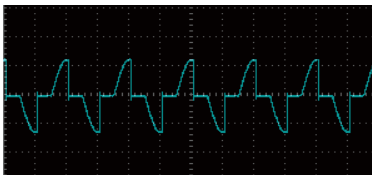

Back Phase Dimmer

Sweep function


This function tests efficiency of switch power supply and gets voltage and frequency value at max power. It could change voltage and frequency by setting start voltage value, end frequency, stepping frequency and time of each step. It saves 10 files max. Voltage, frequency and current of max power will be displayed when the test is over.

Support Three-phase parallel function


IT7300 series AC source can achieve three-phase without requiring external accessories, users can directly connect into three-phase through the back of the SYSTEM BUS, set one of them as master, the rest are slaves. The slave sends synchronous clock control signal according to each cycle of the DDS inside the device, so that the phase difference is always maintained at 120° and does not deviate greatly in long time running. It is flexible to meet the increase or decrease requirements of production line aging test machine numbers.

List function


IT7300 series has built-in DDS waveform generator, very flexible waveform simulation function. Users can directly set the required power waveform through the panel keys, to simulate transient power off, surge, trap, specific phase angle on or off, AC sine wave amplitude and frequency range and other characteristics.




STEP mode




Surge waveform



PULSE mode



Trap waveform





LIST mode

IT7300 Specifications

Model	IT7321	IT7322	IT7322H	IT7324H
INPUT				
Phase	1	1	1	1
Voltage	220Vac±10% or 110Vac±10%	220Vac±10% or 110Vac±10%	220Vac±10% or 110Vac±10%	220Vac±10% or 110Vac±10%
Frequency	47~63Hz	47~63Hz	47~63Hz	47~63Hz
Max current	6.3A(220Vac) or 10A(110Vac)	15A(220Vac) or 30A(110Vac)	15A(220Vac) or 30A(110Vac)	30A(220Vac) or 60A(110Vac)
Power factor	0.5(typical)	0.7(typical)	0.7(typical)	0.7(typical)
AC OUTPUT				
Max power	300VA	750VA	750VA	1500VA
Max current (rms)	0~150V 3A 0~300V 1.5A	6A 3A	0~250V 3A 0~500V 1.5A	6A 3A
Max current (peak)	0~150V 9A 0~300V 4.5A	18A 9A	0~250V 9A 0~500V 4.5A	18A 9A
Phase	1Φ/2W	1Φ/2W	1Φ/3W	1Φ/2W
Total harmonic distortion(T.H.D)	≤0.5% at 45-500Hz (Resistive Load)	≤0.5% at 45-500Hz (Resistive Load)	≤1% at 45-500Hz (Resistive Load)	≤1% at 45-500Hz (Resistive Load)
Crest factor	3	3	3	3
Power regulation	0.1% max for a ±10% line change	0.1% max for a ±10% line change	0.1% max for a ±10% line change	0.1% max for a ±10% line change
Load regulation	≤0.5%FS(Resistive Load)	≤0.5%FS(Resistive Load)	≤0.5%FS(Resistive Load)	≤0.5%FS(Resistive Load)
Response time	<100us	<100us	<100us	<100us
SETTING				
Voltage	Range	0~300V High, 150/300V Auto	0~500V High, 250/500V Auto	0~500V High, 250/500V Auto
	Resolution	0.1V	0.1V	0.1V
	Accuracy	±(0.2%+0.6V)	±(0.2%+0.6V)	±(0.2%+1.2V)
Frequency	Resolution	0.1Hz at 45-99.9Hz 1Hz at 100-500Hz	0.1Hz at 45-99.9Hz 1Hz at 100-500Hz	0.1Hz at 45-99.9Hz 1Hz at 100-500Hz
	Accuracy	0.1Hz	0.1Hz	0.1Hz
	Range	0~360°	0~360°	0~360°
Phase angle	Resolution	0.1°	0.1°	0.1°
	Accuracy	±1°(45-65Hz)	±1°(45-65Hz)	±1°(45-65Hz)
MEASUREMENT				
Voltage(rms)	Range	0~300V	0~500V	0~500V
	Resolution	0.1V	0.1V	0.1V
	Accuracy	±(0.2%+0.6V)	±(0.2%+0.6V)	±(0.2%+1.2V)
Current(rms)	Range	L:120.0mA * M:1.200A * H:3.00A *	L:120.0mA * M:1.200A * H:6.00A *	L:120.0mA * M:1.200A * H:6.00A *
	Resolution	L:0.1mA M:1mA H:10mA	L:0.1mA M:1mA H:10mA	L:0.1mA M:1mA H:10mA
	Accuracy	L:±(0.2%+0.6mA) M:±(0.2%+6mA) H:±(0.2%+40mA)	L:±(0.2%+0.6mA) M:±(0.2%+6mA) H:±(0.2%+60mA)	L:±(0.2%+0.6mA) M:±(0.2%+6mA) H:±(0.2%+60mA)
Current(peak)	Range	0~12A	0~18A	0~24A
	Resolution	0.01A	0.01A	0.01A
	Accuracy	±(1%+0.36A)	±(1%+0.36A)	±(1%+0.36A)
Power	Range	0~12A	0~18A	0~24A
	Resolution	L:0.01W M:0.1W H:1W	L:0.01W M:0.1W H:1W	L:0.01W M:0.1W H:1W
	Accuracy	M:±(0.2%+2W) (47Hz-65Hz) H:±(0.2%+4W) (47Hz-65Hz)	M:±(0.2%+2W) (47Hz-65Hz) H:±(0.2%+6W) (47Hz-65Hz)	M:±(0.2%+2W) (47Hz-65Hz) H:±(0.2%+10W) (47Hz-65Hz)
GENERAL				
Memory storage	10 memories	10 memories	10 memories	10 memories
Synchronous output signal Interface (optional)	Output Signal 5V,BNC type LAN,USB,RS232	Output Signal 5V,BNC type LAN,USB,RS232,GPIO	Output Signal 5V,BNC type LAN,USB,RS232,GPIO	Output Signal 5V,BNC type LAN,USB,RS232,GPIO
Operating environment	0~40°C/20-80%RH	0~40°C/20-80%RH	0~40°C/20-80%RH	0~40°C/20-80%RH
Size	1/2 19" 2U	19" 3U	19" 3U	19" 3U
Weight	10Kg	37Kg	37Kg	37Kg

* This information is subject to change without notice

IT7321 Dimension figure

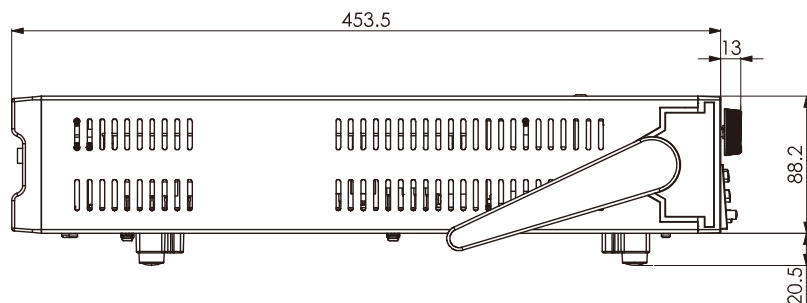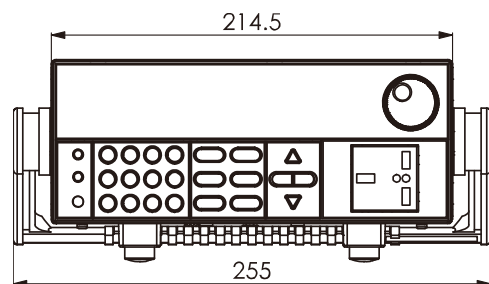

Unit: mm

IT7300 Programmable AC Power Supply




IT7300 Specifications


Model	IT7324	IT7326H	IT7326
INPUT			
Phase	1	1	1
Voltage	220Vac±10% or 110Vac±10%	220Vac±10%	220Vac±10%
Frequency	47~63Hz	47~63Hz	47~63Hz
Max current	30A(220Vac) or 60A(110Vac)	60A	60A
Power factor	0.7(typical)	0.7(typical)	0.7(typical)
AC OUTPUT			
Max power	1500VA	3000VA	3000VA
Max current (rms)	0~150V: 12A 0~300V: 6A	12A 6A	24A 12A
Max current (peak)	0~150V: 36A 0~300V: 18A	36A 18A	72A 36A
Phase	1Φ/2W	1Φ/2W	1Φ/2W
Total harmonic distortion (THD)	≤0.5% at 45-500Hz (Resistive Load)	≤1% at 45-500Hz (Resistive Load)	≤0.5% at 45-500Hz (Resistive Load)
Crest factor	3	3	3
Power regulation	0.1% max for a ±10% line change	0.1% max for a ±10% line change	0.1% max for a ±10% line change
Load regulation	≤0.5%FS(Resistive Load)	≤0.5%FS(Resistive Load)	≤0.5%FS(Resistive Load)
Response time	<100us	<100us	<100us
SETTING			
Voltage	Range	0~300V High, 150/300V Auto	0~300V High, 150/300V Auto
	Resolution	0.1V	0.1V
	Accuracy	±(0.2%+0.6V)	±(0.2%+1.2V)
Frequency	Resolution	±(0.04% per degree from 25°C)	±(0.04% per degree from 25°C)
	Range	45-500Hz	45-500Hz
	Accuracy	0.1Hz at 45-99.9Hz 1Hz at 100-500Hz	0.1Hz at 45-99.9Hz 1Hz at 100-500Hz
Phase angle	Resolution	0~360°	0~360°
	Range	0.1°	0.1°
	Accuracy	±1°(45-65Hz)	±1°(45-65Hz)
MEASUREMENT			
Voltage(rms)	Range	0~300V	0~300V
	Resolution	0.1V	0.1V
	Accuracy	±(0.2%+0.6V)	±(0.2%+1.2V)
Current(rms)	Resolution	±(0.04% per degree from 25°C)	±(0.04% per degree from 25°C)
	Range	L:120.0mA * M:1.200A * H:12.00A *	L:120.0mA * M:1.200A * H:12.00A *
	Accuracy	L:0.1mA M:1mA H:10mA	L:0.1mA M:1mA H:10mA
Current(peak)	Resolution	L:±(0.2%+0.6mA) M:±(0.2%+6mA) H:±(0.2%+80mA)	L:±(0.2%+0.6mA) M:±(0.2%+6mA) H:±(0.2%+0.1A)
	Range	0~48A	0~96A
	Accuracy	±(0.04% per degree from 25°C)	±(0.04% per degree from 25°C)
Power	Resolution	0.01A	0.01A
	Range	±(1%+0.36A)	±(1%+0.36A)
	Accuracy	±(0.05% per degree from 25°C)	±(0.05% per degree from 25°C)
GENERAL	Resolution	L:0.01W M:0.1W H:1W	L:0.01W M:0.1W H:1W
	Range	L:±(0.2%+0.2W) (47Hz-65Hz)	L:±(0.2%+0.2W) (47Hz-65Hz)
	Accuracy	M:±(0.2%+2W) (47Hz-65Hz)	M:±(0.2%+2W) (47Hz-65Hz)
Memory storage	Resolution	H:±(0.2%+10W) (47Hz-65Hz)	H:±(0.2%+15W) (47Hz-65Hz)
	Range	±(0.05% per degree from 25°C)	±(0.05% per degree from 25°C)
	Accuracy	±(0.05% per degree from 25°C)	±(0.05% per degree from 25°C)
Memory storage	10 memories	10 memories	10 memories
Synchronous output signal	Output Signal 5V,BNC type	Output Signal 5V,BNC type	Output Signal 5V,BNC type
Interface (optional)	LAN,USB,RS232,GPIB	LAN,USB,RS232,GPIB	LAN,USB,RS232,GPIB
Operating environment	0~40°C/20~80%RH	0~40°C/20~80%RH	0~40°C/20~80%RH
Size	1/2 19" 3U	19" 6U	19" 6U
Weight	37Kg	103Kg	103Kg

* This information is subject to change without notice

IT7326 Dimension figure

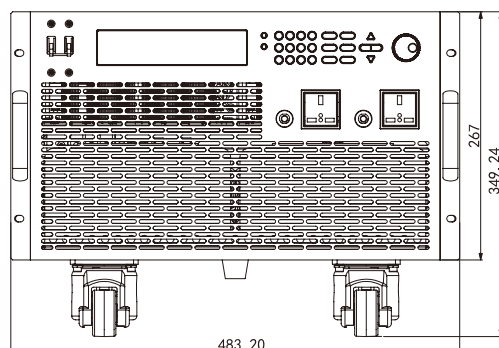

Unit: mm

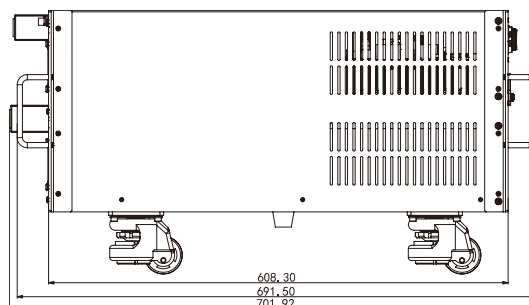

Cal Power

57/ For more information, please visit ITECH official website
www.itechate.com

Via Acquanera, 29 22100 COMO
tel. 031.526.566 (r.a.) fax 031.507.984
info@calpower.it www.caltower.it